RANGE

CLIC® XY-Z


X = band width in mm

Y = thickness diameter in 1/10° mm

Z = lower diameter in 1/10° mm

 D^* = diameter range of fitted hose



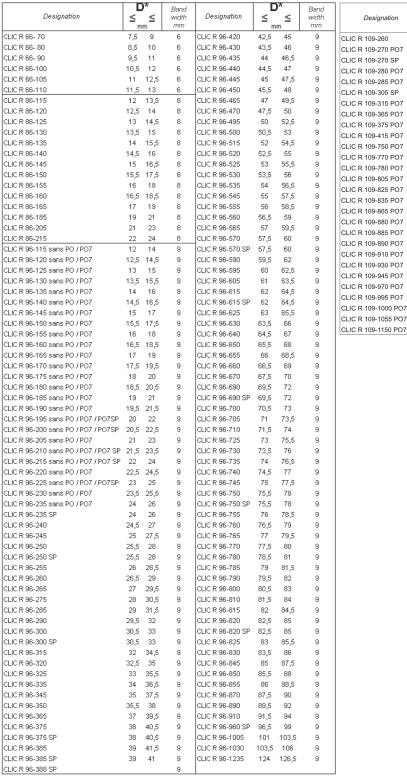

| se | | | | |
|----|--------------------|-------------------|------|---------------------|
| | Designation | D * ≤ ≤ mm | | Band width mm |
| | CLIC R 109-260 | 26,5 | 28,5 | 10 |
| | CLIC R 109-270 PO7 | 27,5 | 29,5 | 10 |
| | CLIC R 109-270 SP | 27,5 | 29,5 | 10 |
| | CLIC R 109-280 PO7 | 28,5 | 30,5 | 10 |
| | CLIC R 109-285 PO7 | 29 | 31 | 10 |
| | CLIC R 109-305 SP | 31 | 33 | 10 |
| | CLIC R 109-315 PO7 | 32 | 34 | 10 |
| | CLIC R 109-365 PO7 | 37 | 39 | 10 |
| | CLIC R 109-375 PO7 | 38 | 40 | 10 |
| | CLIC R 109-415 PO7 | 42 | 44 | 10 |
| | CLIC R 109-750 PO7 | 75,5 | 77,5 | 10 |
| | CLIC R 109-770 PO7 | 77,5 | 79,5 | 10 |
| | CLIC R 109-780 PO7 | 78,5 | 80,5 | 10 |
| | CLIC R 109-805 PO7 | 81 | 83 | 10 |
| | CLIC R 109-825 PO7 | 83 | 85 | 10 |
| | CLIC R 109-835 PO7 | 84 | 86 | 10 |

87 89 10

88,5 90,5 10

89.5 91.5 10

91.5 93.5 10

93,5

95 97

97,5 99,5

100 102 10

100,5 102,5 10

115,5 117,5

95,5 10

10