







# WD12 IS - Technical Properties

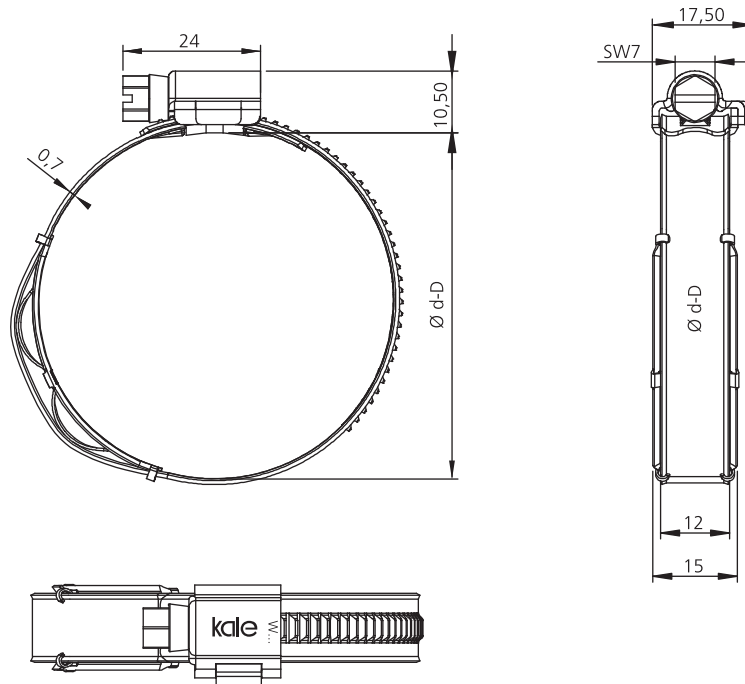

	W3	W4	W5
<b>Screw</b>	1.4016 DIN EN-10088-3 or equivalent	1.4567 DIN EN-10088-3 or equivalent	1.4578 DIN EN-10088-3 or equivalent
<b>Housing</b>	1.4016 DIN EN-10088-2 or equivalent	1.4301 DIN EN-10088-2 or equivalent	1.4401 DIN EN-10088-2 or equivalent
<b>Band</b>	1.4016 DIN EN-10088-2 or equivalent	1.4301 DIN EN-10088-2 or equivalent	1.4401 DIN EN-10088-2 or equivalent
<b>Spring</b>	1.4310 DIN EN-10088-2 or equivalent	1.4310 DIN EN-10088-2 or equivalent	1.4310 DIN EN-10088-2 or equivalent
<b>Corrosion Resistance</b> <small>(min.Hour) ISO 9227</small>	200*	240	400
<b>Screw Head</b>			

\* : %10 red rust allowed on the total surface of W3 products, after salt spray test

Ø d - D (mm) (min - max)	AD max. (Nm)
16-25	5,0
16-27	5,0
20-32	5,0
23-35	5,0
25-40	5,0
30-45	5,0
35-55	5,0
40-60	5,0
45-65	5,0
50-70	5,0
55-75	5,0
60-80	5,0
65-85	5,0

AD: Recommended tightening torque  
Recommended tightening speed 300 - 350 rpm